


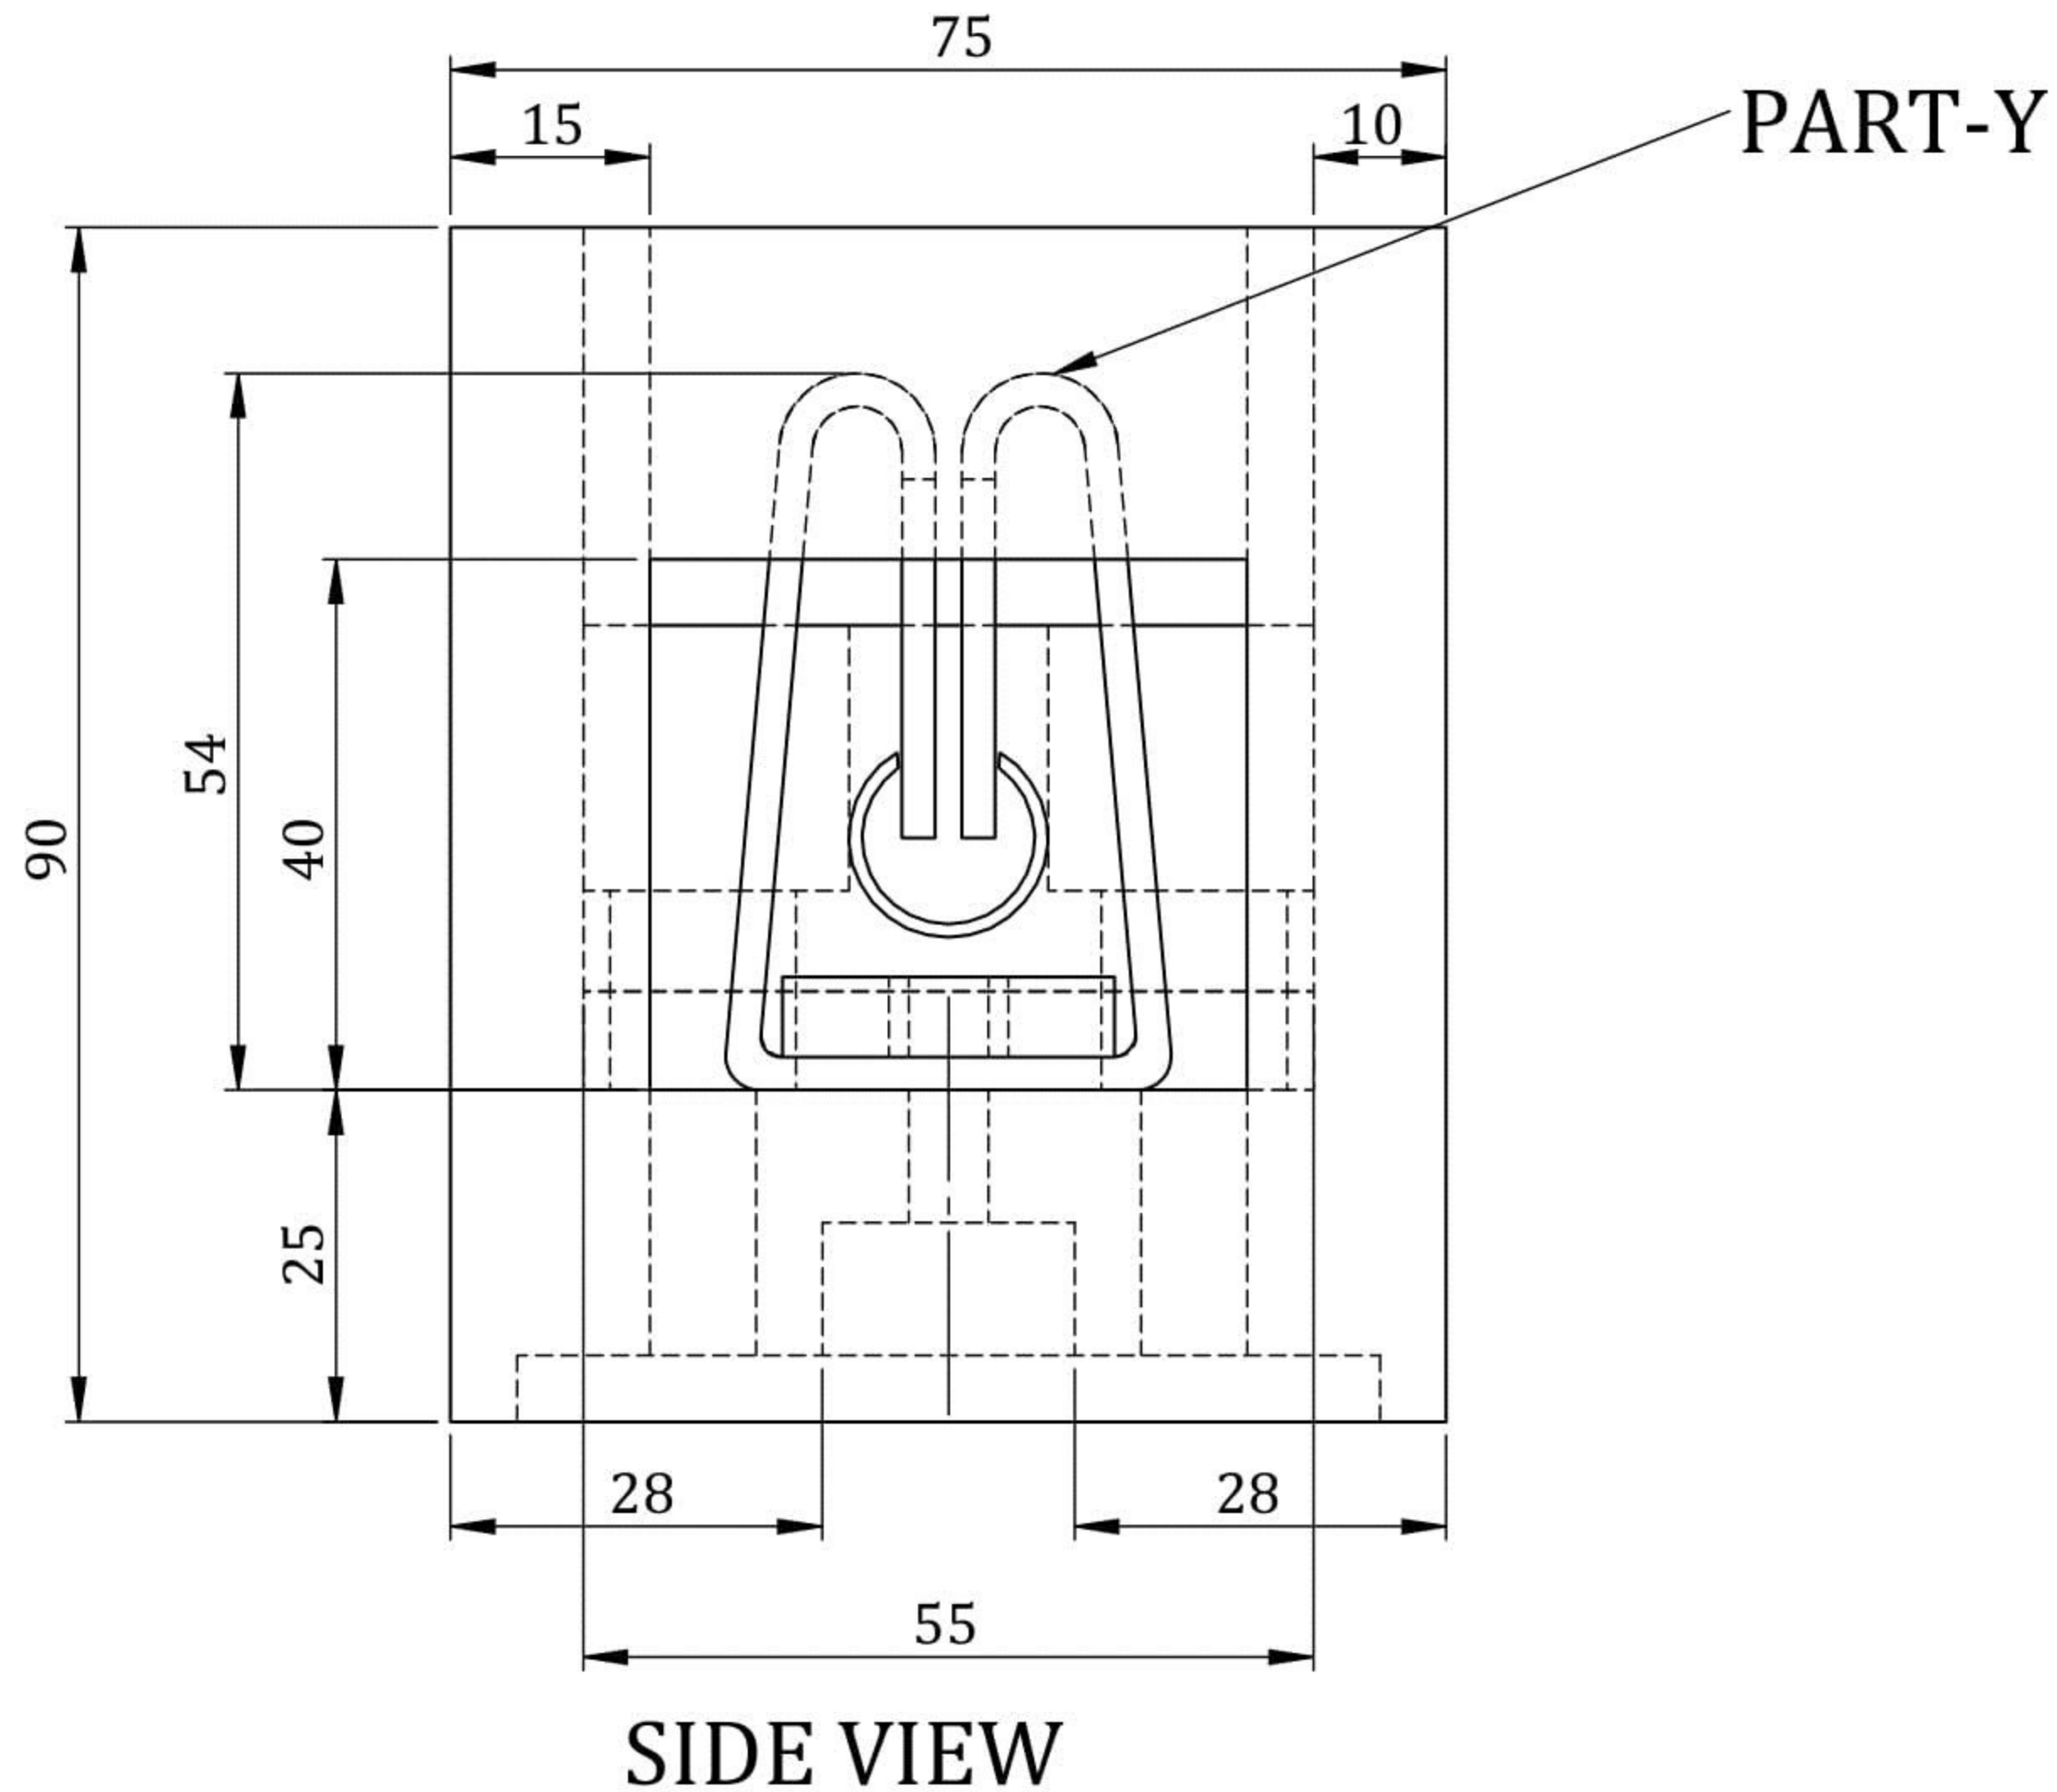

**NOTE:-**

1. WORD 'MGVCL' AND TRADE MARK OF SUPPLIER SHALL BE EMBOSSED BOTH ON FUDE CARRIER AND BASE
2. GENERAL TOLERANCE  $\pm 5\%$  ON LENGTH, WIDTH AND HEIGHT OF THE BODY
3. CENTRE DISTANCE BETWEEN HOLES OF METAL PARTS  
UP TO 50 mm -  $\pm 1\text{mm}$   
ABOVE 50 mm -  $\pm 2\text{mm}$
4. WALL THICKNESS  
UP TO 10 mm -  $\pm 1\text{mm}$   
ABOVE 10 mm -  $\pm 1.5\text{mm}$
5. TOLERANCE  $\pm 5\%$  IN CERAMIC PARTS
6. ALL DIMENSIONS ARE IN mm

DISCOM Name:- MADHYA GUJARAT VIJ COMPANY LIMITED

GENERAL ARRANGEMENT AND COMPONENTS DRG.  
FOR 200Amp., 415 VOLTS KIT-KAT FUSE

DRG. NO.: MGVCL/FUSE/01 REV:03

SHEET 3 OF 9