




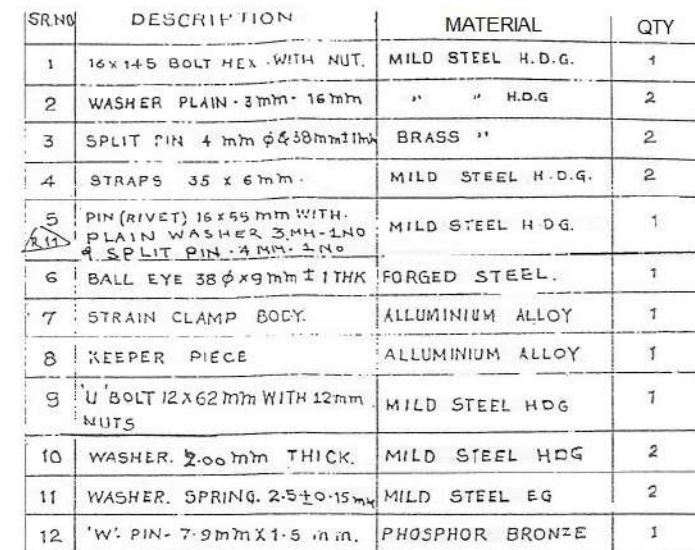


E. G. ELECTRO GALVANISED.



SIZE OF SOCKET
SUITABLE FOR
BALL 16 mm WITH
SUFFICIENT
CLEARANCE

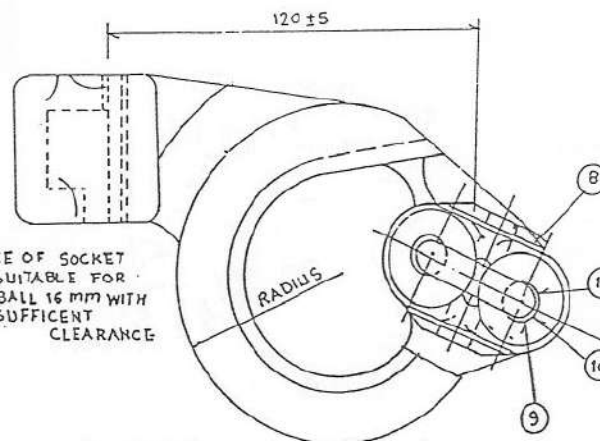

- 1 ALL DIMENSIONS OF BALL EYE SHALL BE AS PER REC SPECIF 3/1971/REV. 1988 HOWEVER THK OF EYE NOT SPECIFIED IN REC SHALL BE 3mm min
- 2 RIB THICKNESS OF ALUMINIUM CLAMP SHOULD BE 4mm $\pm$ 0.5mm
- 3 DEPTH OF CONDUCTOR GROOVE IN ALUMINIUM CLAMP 17mm $\pm$ 1.7mm
- 4 SUITABLE FOR 2500kg S.M.F.L
- 5 BALL EYE SHOULD BE SUPPLIED ALONG WITH 16mm RIVET & SPLIT PIN & WASHER



U-BOLT DETAILS

R-11	REVISED AS PER O.N. (C.R.E. SEC.) N ^o 819 DT. 23-6-00	DT. 27-6-00	SOCKET ENDED STRAIN CLAMP (SNAK TYPE) SUITABLE FOR A.C.S.R. & A-A.A. CONDUCTORS. RANGING FROM 13 MM ² TO 55 MM ²			
R-10	REVISED AS PER O.N. NO. OMRI/1927	DT. 17/12/59				
	DATE		DESIG	CHKD.	CIVIL	REC'D.
		CIVIL	DRWN		ELECT	
		MECH.	C.D.		MECH	APPVD.
		ELECT.	SCALE:	DATE	DRG. NO.	
		APPVD.	N.T.S	22-2-94	02 RABBIT H.W.	