


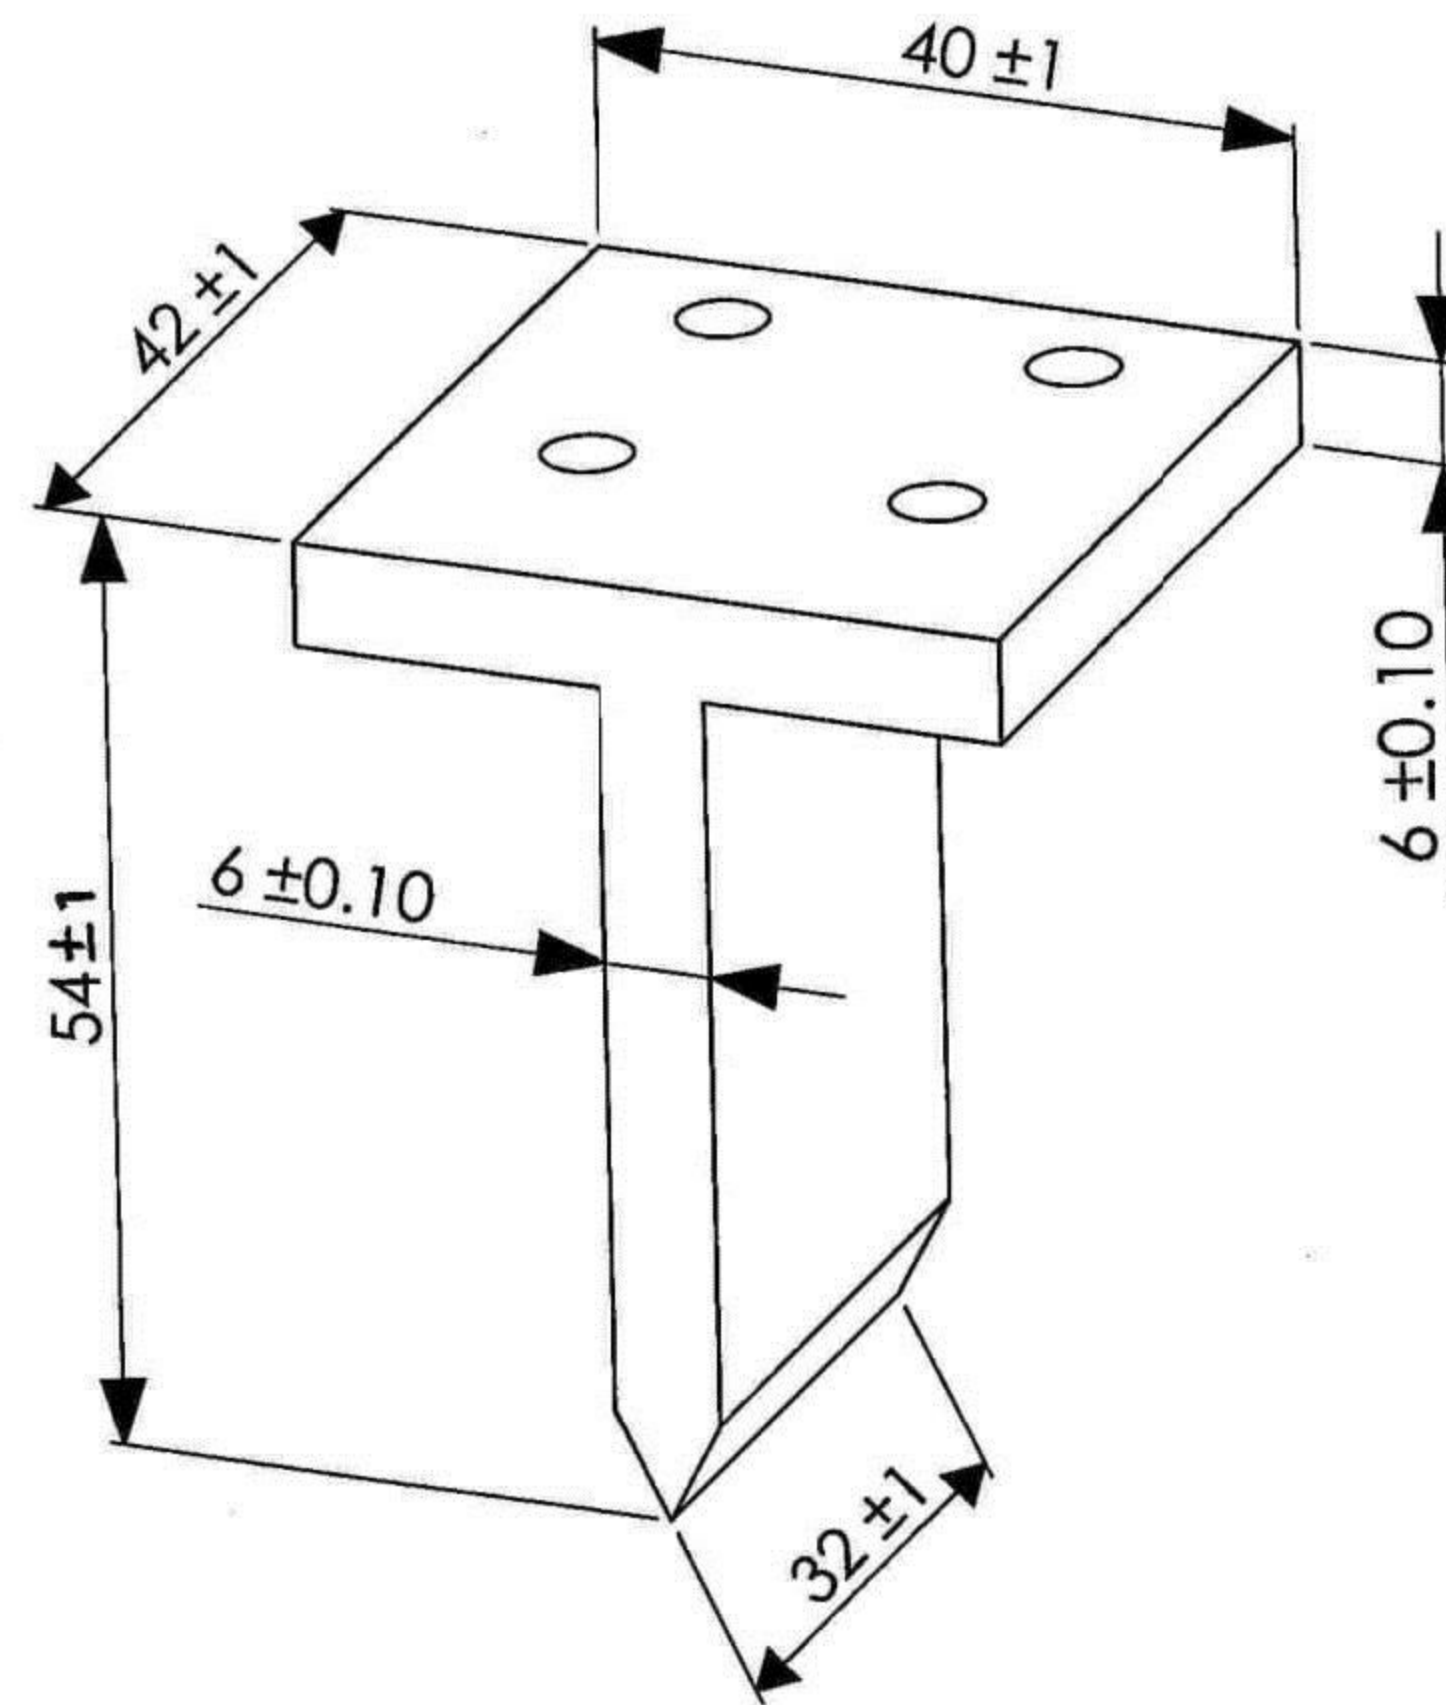

PART X

NOTE:-

1. WORD 'MGVCL' AND TRADE MARK OF SUPPLIER SHALL BE EMBOSSED BOTH ON FUSE CARRIER AND BASE
2. GENERAL TOLERANCE $\pm 5\%$ ON LENGTH, WIDTH AND HEIGHT OF THE BODY
3. CENTRE DISTANCE BETWEEN HOLES OF METAL PARTS
UP TO 50 mm - ± 1 mm
ABOVE 50 mm- ± 2 mm
4. WALL THICKNESS
UP TO 10 mm- ± 1 mm
ABOVE 10mm- ± 1.5 mm
5. TOLERANCE $\pm 5\%$ IN CERAMIC PARTS
6. ALL DIMENSIONS ARE IN mm

DISCOM Name:- MADHYA GUJARAT VIJ COMPANY LIMITED

**GENERAL ARRANGEMENT AND COMPONENTS DRG.
FOR 200Amp., 415 VOLTS KIT-KAT FUSE**

DRG. NO.:-MGVCL/FUSE/01 REV:03

SHEET 8 OF 9