


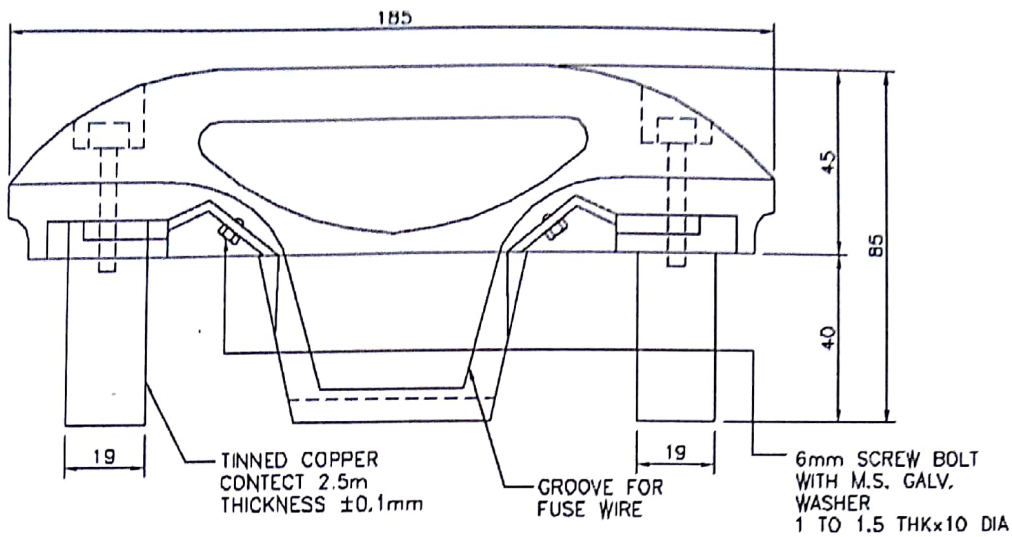
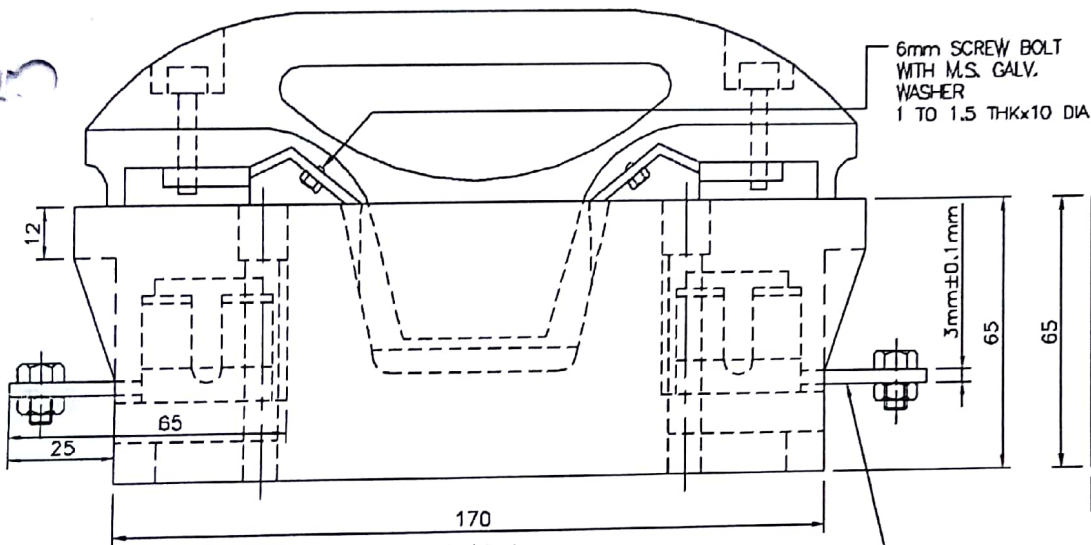


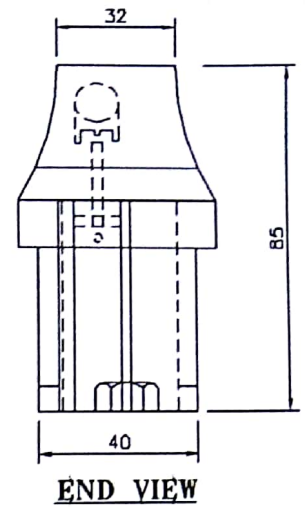

CARRIER

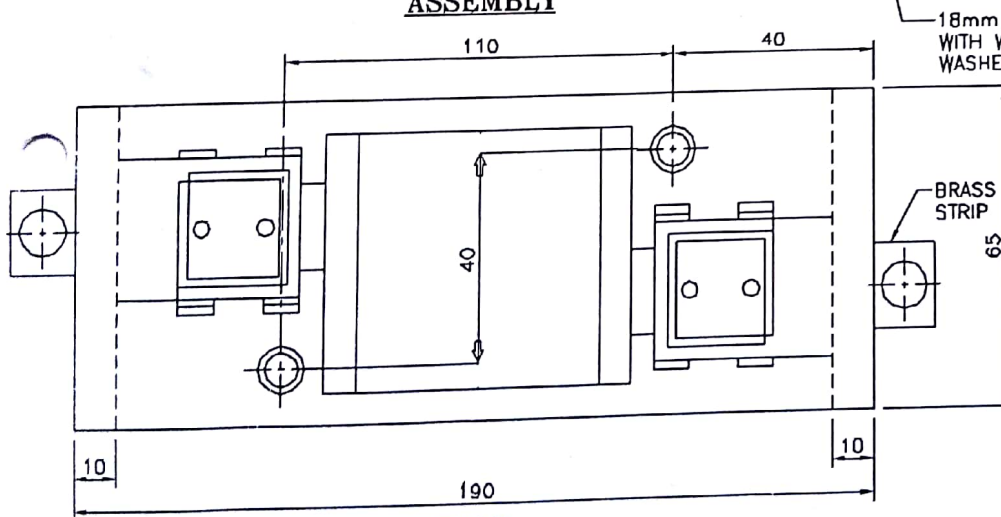

ASSEMBLY

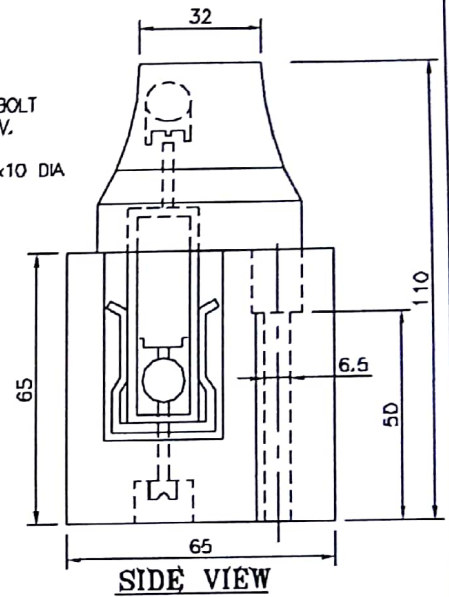

**PLAN
(BASE)**

Notes:-

- 1) GENERAL TOLERANCE $\pm 5\%$ ON LENGTH, WIDTH AND HEIGHT.
- 2) CENTER DISTANCE BETWEEN HOLES UPTO 50mm ± 1 mm. ABOVE 50mm ± 2 mm.
- 3) WALL THICKNESS UPTO 10mm ± 1 mm. ABOVE 10mm ± 1.5 mm.
- 4) TOLERANCE $\pm 5\%$ IN CERAMIC BODY.
- 5) ALL CURRENT CARRYING PARTS SHOULD BE TINNED PLATED
- 6) ALL DIMENSIONS ARE IN mm.
- 7) WORD xxVCL BRAND SHALL BE EMBOSSED BOTH ON FUSE CARRIER & BASE (XX should be replaced with respective DISCOM name)

DISCOM Name: MADHYA GUJRAT VIJ CO LTD

Drawing Title: 100 Amp KitKat Fuse, 415 V

Drawing No.: DISCOM / FUSE / 01 REV 01 FOR 100 AMP